

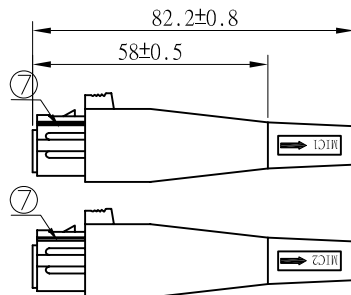



RoHS Compliant

REVISION	MODITY RECORD	DATE
A/0	FIRST DRAWING	2007.01.17

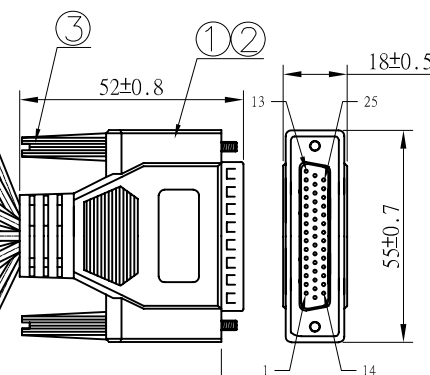

RED J4
WHITE J5
WHITE J6
WHITE J7
RED J8
RED J9
RED J10
WHITE J11
WHITE J12
WHITE J13
RED J14
RED J15
WHITE J16
RED J17

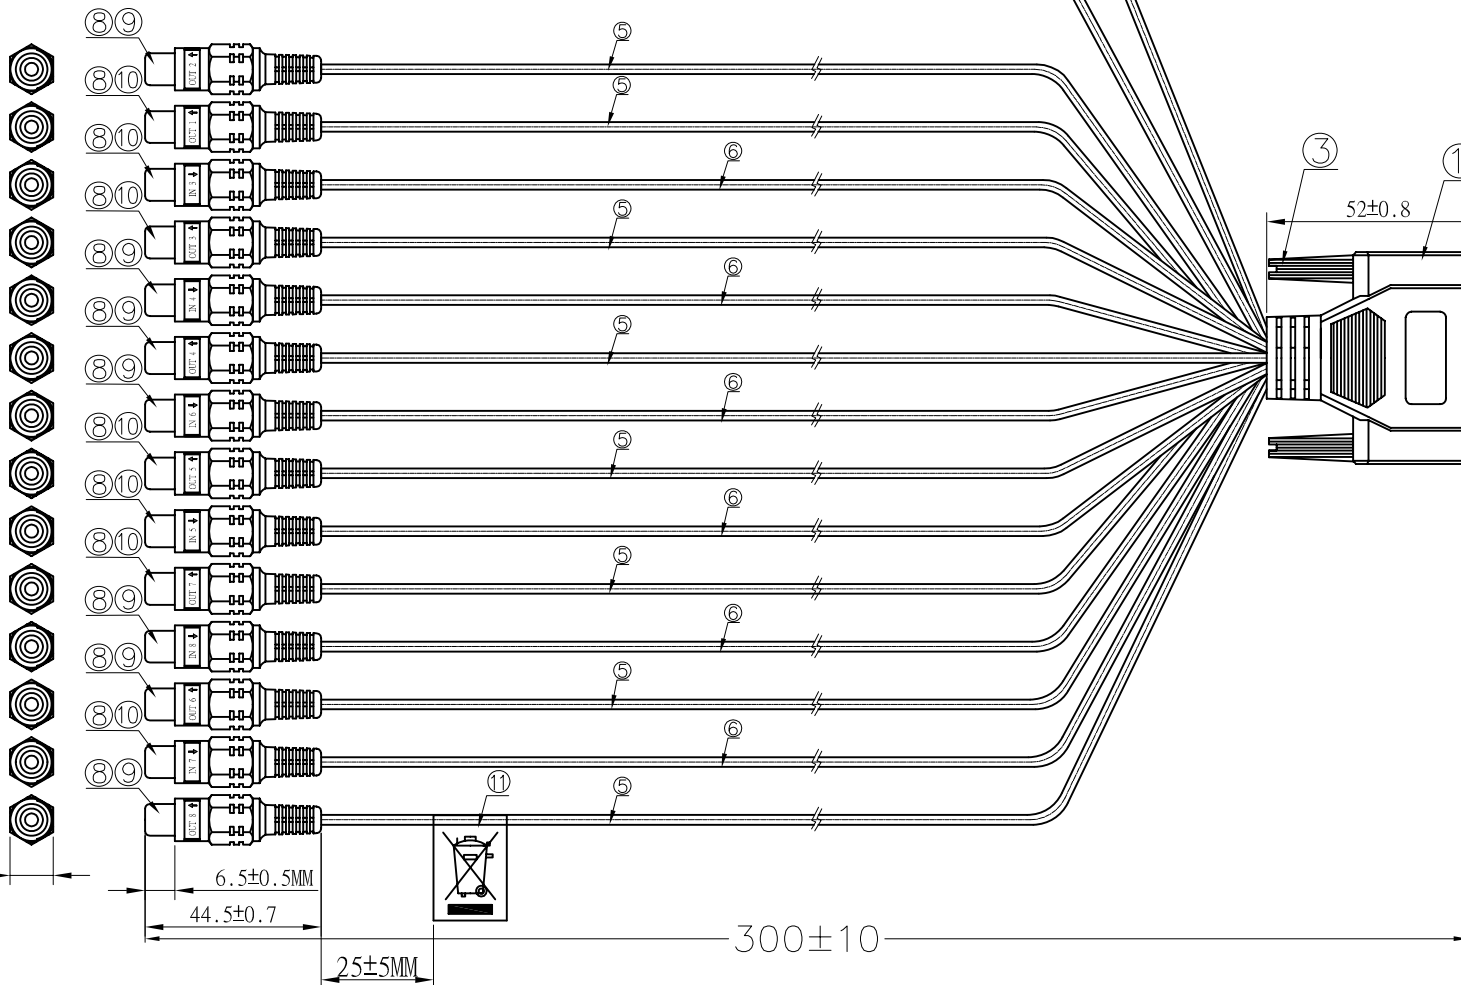

JAWS

兆泰股份有限公司
JAWS ELECTRONIC CO., LTD.

DESCRIPTION	DELTA 1010LT ANALOG	DESIGNED	Kevinlee		
CUSTOMER NAME		CHECKED			
CUSTOMER NO.		APPROVED		SCALE	NOT TO SCALE
DRAWING NO.	03-290-D003	DATE	2007.01.17	UNITS	MM


RoHS Compliant

REVISION	MODITY RECORD	DATE
A/0	FIRST DRAWING	2007.01.17

WIRING DIAGRAM

J1(HDB44M)

MIC OR RCA F

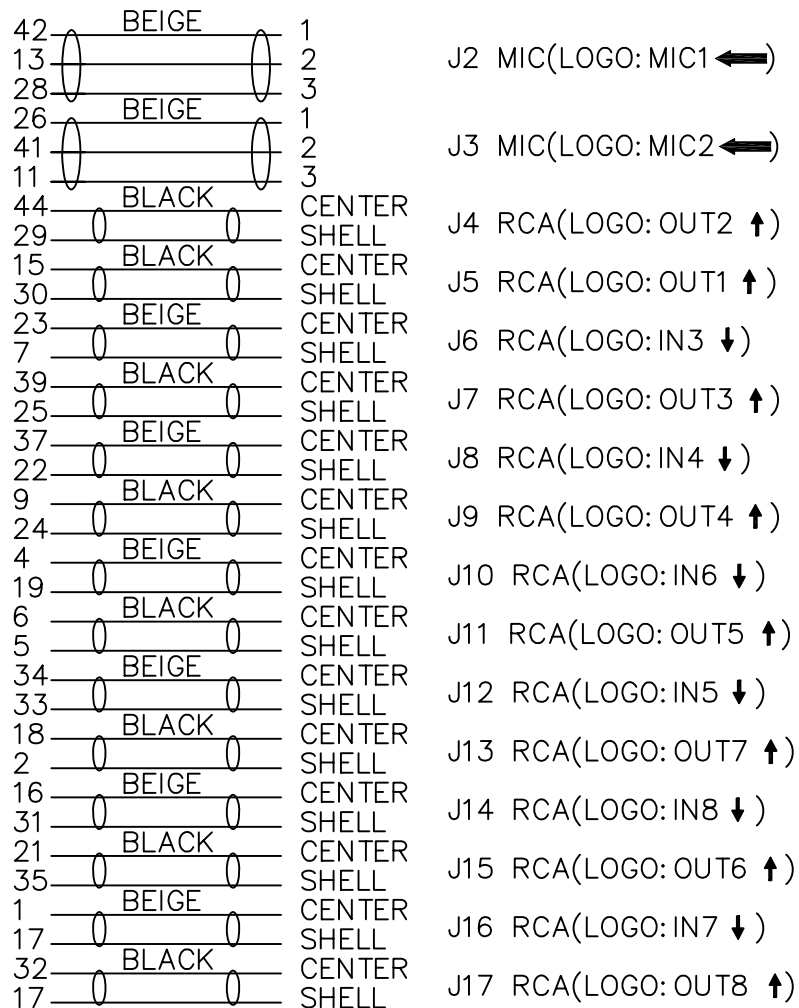

SPECIFICATION:

- 1.CONDUCTOR RESISTANCE:2 OHM MAXIMUM
- 2.INSULATION RESISTANCE:10M OHM MINIMUM
- 3.OPEN/SHORT TESTING:100% TEST
- 4.HI-POT VOLTAGE: 250V

12	98-040071623	1	PCS	PE BAG
11	95-001-02488	1	PCS	LABLE
10	89-0010-0050	70	9	OUTSIDE MOLDED PVC 50% WHITE
9	89-0003-0050	70	9	OUTSIDE MOLDED PVC 50% RED
8	79-0001-TS01	14	PCS	RCA FEMALE
7	80-1003-TS09	2	PCS	MICROPHONE JACK
6	11-0228-000058	6	PCS	CABLE
5	11-0228-010058	8	PCS	CABLE
4	11-0228-000054	2	PCS	CABLE
3	88-2401-01	2	PCS	SCREW #4-40
2	89-0001-0050	35	9	OUTSIDE MOLDED PVC
1	3610-JP-4407	1	PCS	HD-SUB 44P MALE W/GOLD SOLDER TYPE 前鍍后錫藍膠
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION



兆泰股份有限公司
JAWS ELECTRONIC CO., LTD.

DESCRIPTION	DELTA 1010LT ANALOG	DESIGNED	Kevinlee		
CUSTOMER NAME		CHECKED			
CUSTOMER NO.		APPROVED		SCALE	NOT TO SCALE
DRAWING NO.	03-290-D003	DATE	2007.01.17	UNITS	MM